

# Hiab Multilift XP Classic range hooklifts



Basic Data


## XP22Z

## Technical data

### Type

### XP22Z

Vehicle type	3 axle	
GVW of the vehicle (t)	26	
Capacity (t)	22	
G-length	51	53
System weight (kg) *	2690	2720
Tipping angle (°)	53	49
Max. operating pressure (MPa)	30	
Recommended max. oil flow (l/min)	100	

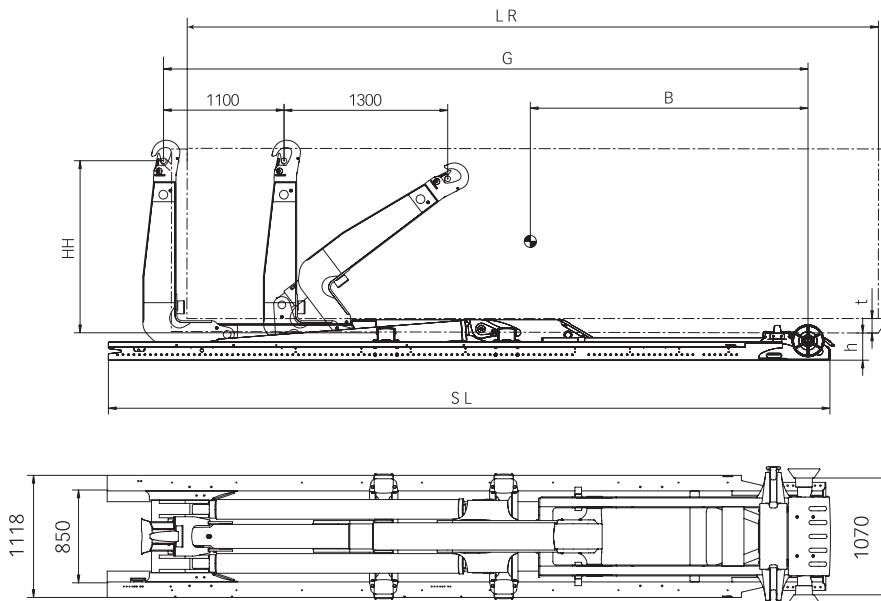

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they can be CE marked. We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

## Primary dimensions

### Model

### XP22Z.51

### XP22Z.53

LR = Body length (m) (min – max)	3.2 - 6.1	3.5 - 6.3
SL = Subframe length (mm) **	5753	5983
B = Centre of gravity (mm)	2800	2950
G = Exact G-length (mm)	5080	5320
LH = Min operating height (mm)	2720	2720
t = Min free tunnel height (body) (mm)	125	
h = Installation height (mm)	250	
HH = Hook height (mm) ***	1570	

**Cargotec** improves the efficiency of cargo flows on land and at sea - wherever cargo is on the move. Cargotec's brands MacGregor, Kalmar and Hiab are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. [www.cargotec.com](http://www.cargotec.com)



**Megafab Engineering Pte Ltd**  
 7 Gul Road  
 Singapore 629364  
 T: (65) 6898 1055 (65) 9141 1333  
 E: [sales@megafab.com.sg](mailto:sales@megafab.com.sg)  
 W: [www.megafab.com.sg](http://www.megafab.com.sg)